



HATCH SPRING

- simple to operate
- easy to install
- maintenance free...


made of the
finest quality
stainless
steel



so simple to operate...



just
touch
to lower!

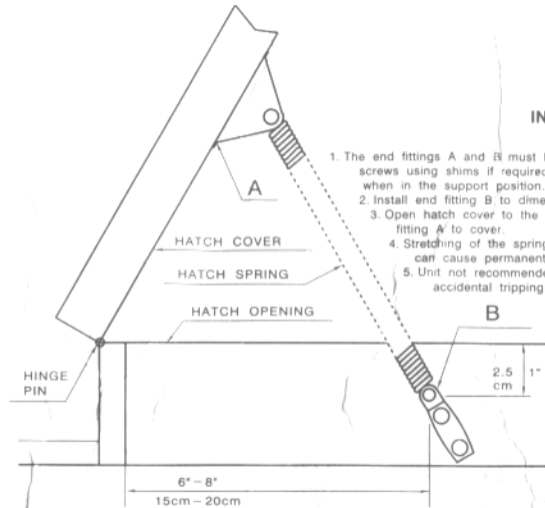

INSTALLATION NOTES

1. The end fittings A and B must be installed with #6 screws using shims if required so that the spring is straight when in the support position.
2. Install end fitting B to dimensions shown.
3. Open hatch cover to the desired position and install end fitting A to cover.
4. Stretching of the spring longer than its free length can cause permanent damage.
5. Unit not recommended for applications where accidental tripping can cause injury.

Made in Taiwan